



Tribe 16 Tac Back JK and JL Mounting Instructions

1. Organize Molle Bags on panel before installing on seat.




2. With the seat slid all the way forward and the seat back folded forward, locate the head rest release buttons. They will both need to be depressed to remove the headrest completely.



3. Align head rest posts with the holes in the panel and the holes in the in the headrest adjusters. Reinstall the headrest.



4. Run the bungy ball chord through the bottom corners of the mole panel and under the seat to a suitable hooking spot on the seat, be aware of any electrical wires or hoses attached to the seat and avoid hooking to those. Pull the chord back around the ball and check that the panel is secure to the back of the seat

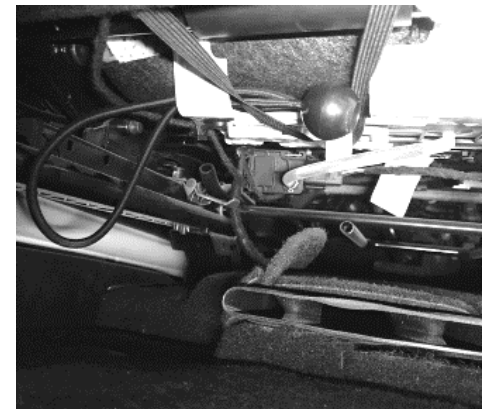

Typical JK Hook Spot

Typical JL Hook Spot